



## Specifications

<b>Chemical system</b>	zinc-manganese dioxide (free of Hg, Cd and Pb)
<b>Voltage</b>	1.5V
<b>Capacity (mAh)</b>	6.200 (6.8 Ω, 24 h/d, 0.9 V)
<b>Dimensions of battery (mm)</b>	Ø 24.9 - 26.2, Height 48.6 - 50.0
<b>Weight</b>	~ 70.0 g
<b>Design</b>	CARDIOCELL
<b>Standards/certifications</b>	IEC, ANSI, JIS
<b>Dangerous goods</b>	no



## Type designation

IEC = LR14 JIS = AM2 ANSI = C

**CARDIOCELL** Alkaline Plus Baby C LR14

## Chemical system

Electrolyte-zinc-manganese dioxide (mercury & cadmium free)

## Dimensions

Diameter = 24.9 - 26.2, Height = 48.6 - 50.0

## Weight

The weight of each battery is approx. 70 g.

## Heavy metal content (%)

Mercury: ≤ 1 ppm, Cadmium ≤ 10 ppm, Lead ≤ 40 ppm

## Appearance and terminal

Battery shall be clean and have no dirt, no leakage and no deformation which may affect their performance and actual use and shall have clearly visible markings.



## Battery capacity

Test environment = 20 °C +/- 2.6 %; 15 % R. H.

Load resistance = 6.8 ohms; daily period 24 h/d; cut-off voltage 0.9 V

► The capacity of each battery is approx. 6,200 mAh

## Storage characteristics

After 12 months at 20 °C ► 90 % capacitance of fresh cells

After 24 months at 20 °C ► 85 % capacitance of fresh cells

## Electrical characteristics

Test environment = 20 °C +/- 2.6 %; 15 % R. H.

Load resistance = 3.9 ohms; measure time 0.3 s)

All samples shall be normalized for a minimum of 8 hours at the above environment prior to measurement.

	OCV (V)	CCV (V)	SCC (A)
<b>initial</b>	≥ 1.59	≥ 1.50	≥ 10
<b>after 12 months storage</b>	≥ 1.57	≥ 1.45	≥ 8

OCV = open circuit voltage; CCV = close circuit voltage; SCC = short circuit current

## Discharge test (service life)

Test environment = 20 °C +/- 2.45 %; 75 % R. H.

load resistance	3.9Ω	3.9Ω	3.9Ω	6.8Ω	20Ω
<b>daily period</b>	24 h/d	4 min/h, 8 h/d	1 h/d	1 h/d	4 h/d
<b>cut-off voltage</b>	0.9 V	0.9 V	0.8 V	0.9 V	0.9 V
<b>initial</b>	18.0 h	18.0 h	19.0 h	34.0 h	110 h
<b>after 12 months storage</b>	17.0 h	17.0 h	17.5 h	31.0 h	105 h

The initial discharge test shall commence within 30 days of manufacture.

The discharge time is the minimum average duration (MAD).

Test quantity: n = 9 pcs. per discharge test



## Discharge curves

- |                                      |   |                                       |
|--------------------------------------|---|---------------------------------------|
| 1) 3.9 Ω - 24 h/d - to 0.9 V         | ▶ | continuous discharge curve (App. 1)   |
| 2) 3.9 Ω - 4 min/h, 8 h/d - to 0.9 V | ▶ | intermittent discharge curve (App. 1) |
| 3) 3.9 Ω - 1 h/d - to 0.8 V          | ▶ | intermittent discharge curve (App. 1) |
| 4) 6.8 Ω - 1 h/d - to 0.9 V          | ▶ | intermittent discharge curve (App. 2) |
| 5) 20 Ω - 4 h/d - to 0.9 V           | ▶ | intermittent discharge curve (App. 2) |

## Safety test

Test environment = 20 °C +/- 2.6 %; 15 % R. H.

Test item	Test method	Test pcs.	Requirements
<b>Over-discharge leakage test</b>	3.9 Ω - 24 h/d - 48 hours	9	no leakage
	3.9 Ω - 4 min, 8 h/d - to 0.6 V	9	no leakage
	3.9 Ω - 1 h/d - to 0.6 V	9	no leakage
	20 Ω - 4 h/d - to 0.6 V	9	no leakage
	6.8 Ω - 1 h/d - to 0.6 V	9	no leakage
<b>High temperature test</b>	60 +/- 2 °C, 90 +/- 5 % R. H. After 20 days of storage the cells shall be stored in an ambient temperature of 20 +/- 2 °C, 60 +/- 5 % R. H. for 4-24 hours.	40	no leakage
<b>1 pc. of battery, short-circuit test</b>	The terminal of an un-discharged battery is connected by wire. The circuit is completely for 24 hours or until the case temperature has return to environment.	10	no leakage, no explosion
<b>Reversible charge</b>	4 pcs. of battery are in series connected and one of them is under incorrect polarity for 24 hours or until the case temperature has return to environment.	40	no explosion
<b>Over-discharge</b>	One battery is discharged at 20 Ω to 0.6 V, then in series connected with 3 pcs. of new battery with 20 Ω for 24 hours.	36	no explosion
<b>4 pcs. of battery in series short circuit test</b>	The terminal of 4 pcs. of battery is connected by wire. The circuit is completely for 24 hours or until the case temperature has return to environment.	40	no explosion
<b>Free fall test</b>	The battery free drops from 1 meter height for 6 times, then stored for 1 hour.	10	no explosion
<b>Impact under high and low temperature</b>	Un-discharged battery stored in test box under 70 +/- 2 °C for 24 hours, then changed to -20 °C for 24 hours, repeat the above condition for 10 cycles.	20	no explosion
<b>Storage after partial discharge</b>	50 % discharged battery stored under 45 +/- 5 °C for 30 days	9	no leakage no explosion

## Expiry period

7 years.


## Expiry period marking

For example: 08-2015 means the expiry date is August 2015.




## Appendix 1


LR14, 3.9 ohms continuous discharge curve

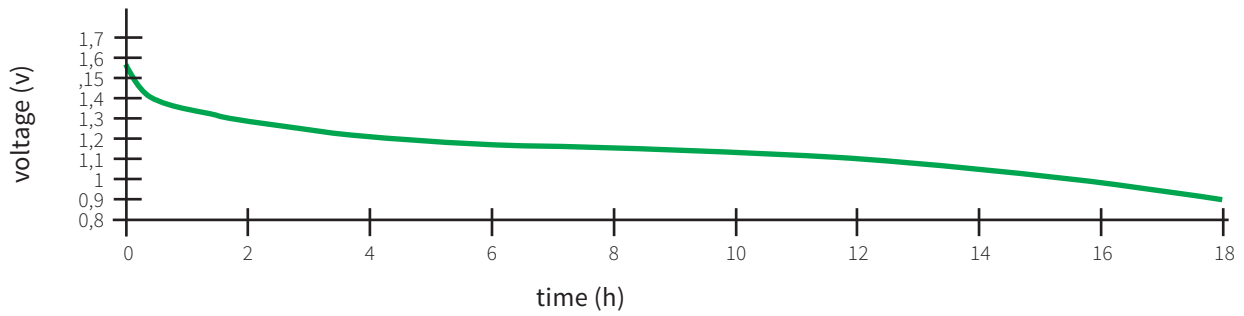

LR14, 3.9 ohms (4m/h, 8h/d) intermittend discharge curve

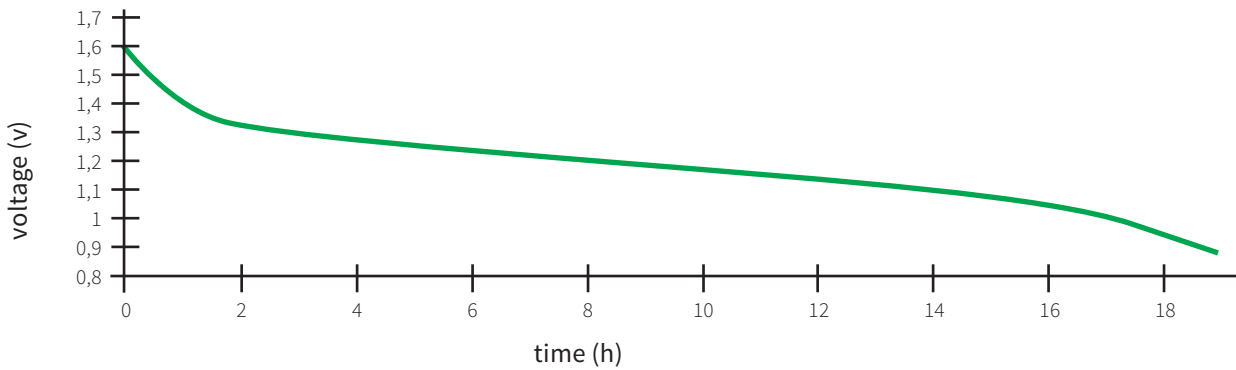


LR14, 3.9 ohms (1h/d) intermittend discharge curve

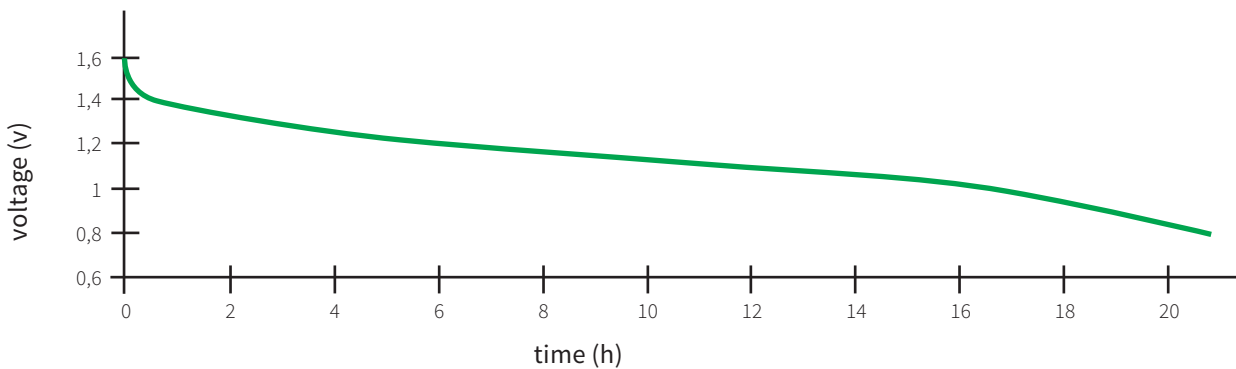



## Appendix 2

LR14, 6.8 ohms intermittend discharge curve

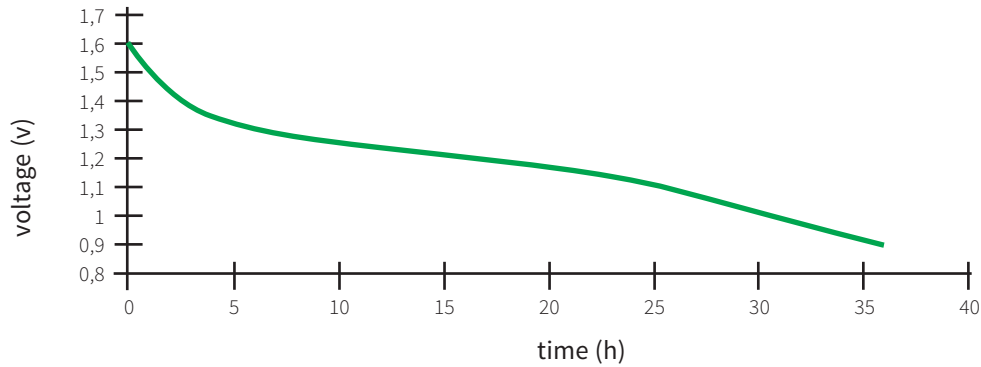

LR14, 20 ohms intermittend discharge curve

